



Applies To: 1997 Prelude – ALL

April 21, 1997

### Service Manual Update: Mirror Replacement


The 1997 Prelude Service Manual incorrectly describes the *Mirror Replacement* procedure. Make a note on service manual page 20-14 to refer to this service bulletin.

#### WARRANTY CLAIM INFORMATION


None; this is for information only.

#### MIRROR REPLACEMENT


1. Pivot the mirror to access the center ball/socket from the top.

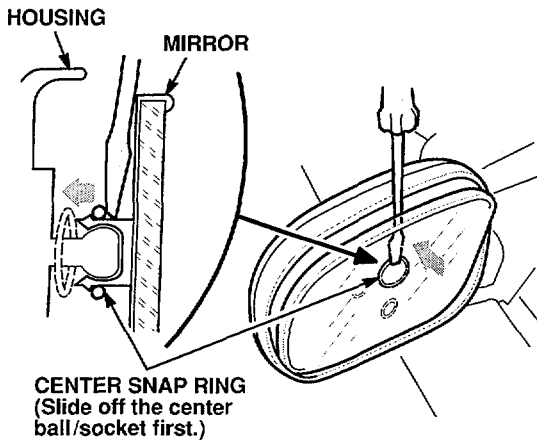


2. Slide the snap ring off the center mirror socket, and pry lightly with a flat-tip screwdriver on the mirror to separate the ball from the socket.
3. Repeat the procedure for the bottom worm-drive ball/socket, then the left ball/socket. Make sure you follow this order to prevent damaging the actuator.

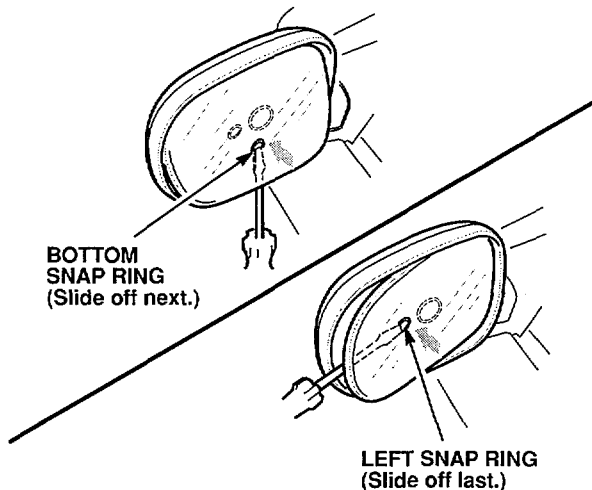

4. Remove the mirror, and retain the snap rings.

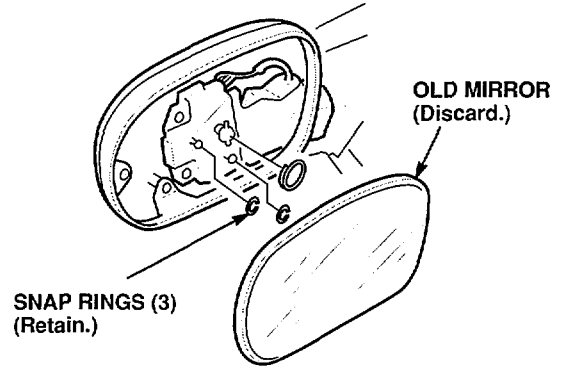

5. Install the snap rings onto the new mirror.

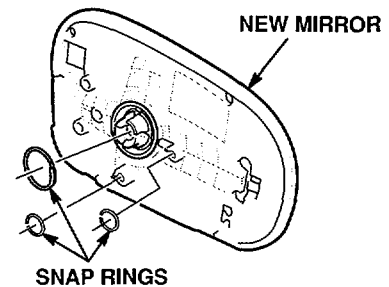

#### CAUTION

Wear leather gloves to protect your hands from broken glass in case the mirror breaks during installation.

6. Press on the center of the mirror to reconnect each ball/socket. To prevent the glass from breaking, do not apply excessive pressure on the sides of the mirror.

